


Wirable socket

SDOGL070PLSFKPG

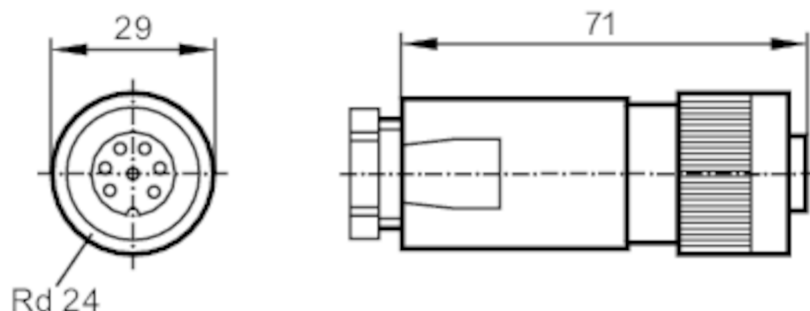

Application

Special feature

Gold-plated contacts

Electrical data

Operating voltage

[V]

< 45 AC / < 70 DC

Operating conditions

Ambient temperature

[°C]

-40...100

Protection

IP 67

Mechanical data

Weight

[g]

49.4

Dimensions

[mm]

29 x 29 x 71

Materials

PBT

Moulded-body material

PBT

Material nut

PBT

Remarks

Pack quantity

1 pcs.

Electrical connection

terminals: ...2.5 mm²; Cable sheath: Ø 10...12 mm


Electrical connection - socket

Connector: 1 x Rd24, straight; Moulded body: PBT; Locking: PBT; Contacts: gold-plated

E70142

Wirable socket

SDOGL070PLSFKPG



Connection

