




Check valve type 562 PVC-U
With solvent cement sockets metric

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

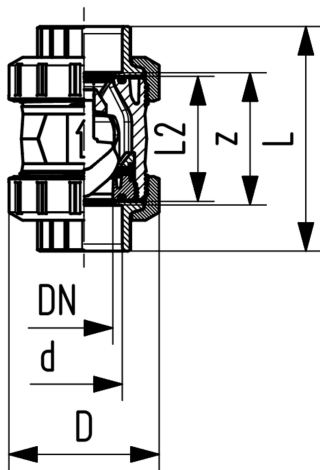

d	DN	PN	kv-value	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
			(l/min)						
16	10	16	190	161 562 001	1	0.120	161 562 011	1	0.120
20	15	16	180	161 562 002	1	0.130	161 562 012	1	0.130
25	20	16	380	161 562 003	1	0.250	161 562 013	1	0.270
32	25	16	460	161 562 004	1	0.290	161 562 014	1	0.290
40	32	16	850	161 562 005	1	0.510	161 562 015	1	0.510
50	40	16	1080	161 562 006	1	0.750	161 562 016	1	0.750
63	50	16	1670	161 562 007	1	1.330	161 562 017	1	1.340
75	65	16	2950	161 562 008	1	3.160	161 562 018	1	3.170
90	80	16	3600	161 562 009	1	5.040	161 562 019	1	5.060
110	100	16	4150	161 562 010	1	8.130	161 562 020	1	8.170

d	D	L	L2	z	closest
(mm)	(mm)	(mm)	(mm)	(mm)	inch
					(inch)
16	50	92	56	64	$\frac{3}{8}$
20	50	95	56	64	$\frac{1}{2}$
25	58	110	65	72	$\frac{3}{4}$
32	68	123	71	79	1
40	84	146	85	94	1 $\frac{1}{4}$
50	97	157	89	95	1 $\frac{1}{2}$
63	124	183	101	107	2
75	166	233	136	144	2 $\frac{1}{2}$
90	200	254	141	151	3
110	238	301	164	174	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>