





Butterfly valve type 567 ABS Hand lever with ratchet settings

Model:


- Overall length according to EN 558, ISO 5752
- Connecting dimension: ISO 7005 PN 10, EN 1092 PN 10, DIN 2501 PN 10, ANSI/ASME B 16.5 Class 150, BS 1560: 1989, BS 4504, JIS B 2220



d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)
63	50	10	1470	169 567 002	1	1.187
75	65	10	2200	169 567 003	1	1.282
90	80	10	3000	169 567 004	1	1.420
110	100	10	6500	169 567 005	1	2.020
140	125	10	11500	169 567 006	1	2.536
160	150	10	16600	169 567 007	1	3.337
225	200	10	39600	169 567 008	1	5.808
280	250	10	55200	169 567 009	1	14.328
315	300	10	80000	169 567 010	1	18.899

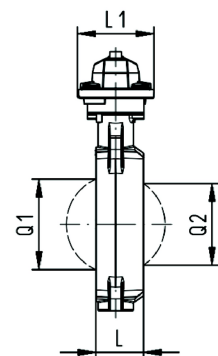

d (mm)	d2 (mm)	D (mm)	D1 min. (mm)	D1 max. (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L (mm)	L1 (mm)	L2 (mm)	Q1 (mm)	Q2 (mm)	closest inch (inch)
63	104	19	120.0	125.0	265	77	134	54	45	106	205	40		2
75	115	19	139.7	145.0	277	83	140	54	46	106	205	54	35	2 1/2
90	131	19	150.0	160.0	289	89	146	54	49	106	205	67	50	3
110	161	19	175.0	190.5	326	104	167	55	56	106	255	88	74	4
140	187	23	210.0	215.9	353	117	181	55	64	106	255	113	97	5
160	215	24	241.3	241.3	374	130	189	55	72	106	255	139	123	6
225	267	23	290.0	295.0	435	158	210	67	73	140	408	178	169	8
280	329	25	353.0	362.0	554	205	264	85	113	149	408	210	207	10
315	379	25	400.0	432.0	598	228	285	85	113	149	408	256	253	12



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>