

MATERIALS LIST:

NO.	PART NAME	MATERIAL
1	BODY	1.0619 1.4308 1.4408
2	SCREEN	SUS304
3	GASKET	PTFE
4	BONNET	1.0619 1.4308 1.4408
5	GASKET	PTFE
6	STOPPER	1.4408
7	SPRING WASHERS	SUS304
8	BONNET BOLT	A4-70


SCREEN SPECIFICATION

SIZE	PERFORATION
1/2"-11/4"	1.5MM
11/2"-8"	2MM

DIMENSIONS:

SIZE	d	L	H	D	C	G	f	T	N-Ø
1/2"	15	130	85	95	65	45	2	14	4-Ø14
3/4"	20	150	87	105	75	58	2	16	4-Ø14
1"	25	160	114	115	85	68	2	16	4-Ø14
11/4"	32	180	114	140	100	78	2	16	4-Ø18
11/2"	40	200	135	150	110	88	3	16	4-Ø18
2"	50	230	155	165	125	102	3	18	4-Ø18
21/2"	65	290	189	185	145	122	3	20	4-Ø18
3"	80	310	200	200	160	138	3	20	8-Ø18
4"	100	350	232	220	180	158	3	20	8-Ø18
5"	125	400	274	250	210	188	3	22	8-Ø18
6"	150	480	326	285	240	212	3	22	8-Ø22
8"	200	600	397	340	295	268	3	24	12-Ø22
10"	250	730	512	405	355	320	3	26	12-Ø26
12"	300	850	562	460	410	378	4	28	12-Ø26

* All dimensions are subject to change without further notification.

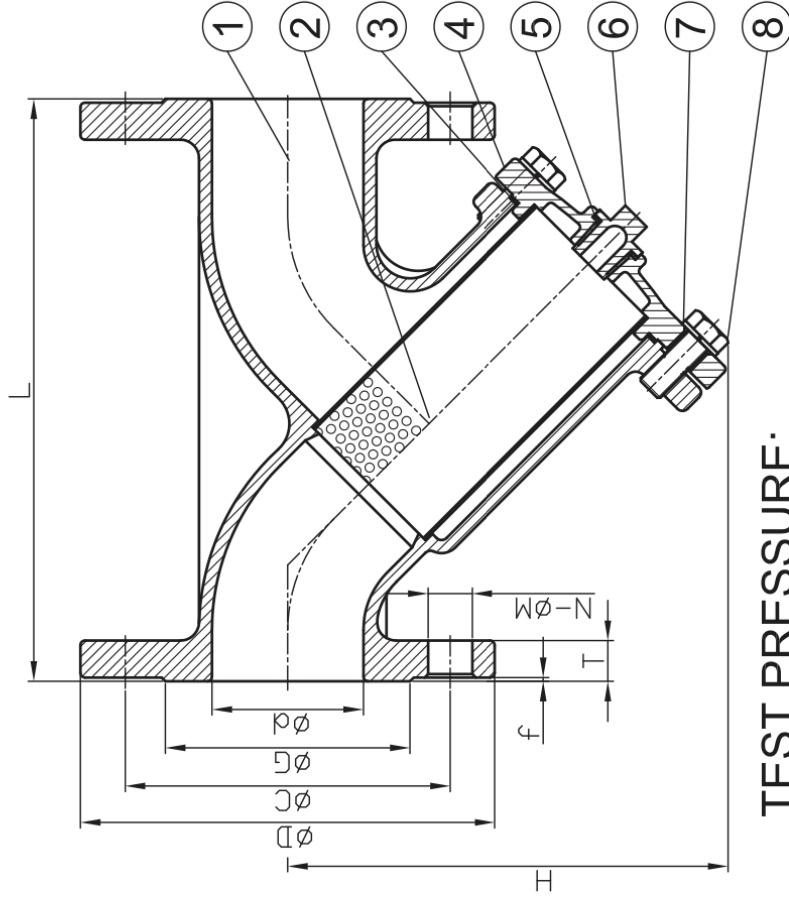

TEST PRESSURE:

SHELL	BY WATER	345PSI 24kg/cm ²
	BY AIR	85PSI 6kg/cm ²

FEATURES:

- FACE TO FACE DIMENSION: DIN3202-F1
- END FLANGE DIMENSIONS: DIN2633
- DESIGN: ANSI B16.34
- TEST: EN 12266-1
- INVESTMENT CASTING BODY

DESC	Y-STRAINER PN16 FLANGE END	DRAWING #	ETG-YS16
APPROVED BY.		DATE	11/07/2011
DRAWER		MATERIAL	MODIFICATION